

Further Equipment

Single-pole Earthing and Discharge Devices

Discharge devices

- For discharging static charges
- Different contact electrodes
- Coupling electrode, especially for round conductors (Ø12 ... 26.5 mm) of electrostatic precipitator systems
- Waterproof, plastic-sheathed cable entries, with additional anti-kink protection




General Information:

Use	Not suitable for use in wet weather conditions
Material (contact electrode)	Copper alloy/gal Sn
Material (contact and coupling electrode)	Zamak
Material (coupling electrode)	Bronze/gal Sn
Material (insulating tube)	Glass-fibre reinforced polyester tube
Material (earthing cable)	Highly flexible copper




Single-pole device for discharging static charges

With Handle and Earth Clamp with Wing Bolt

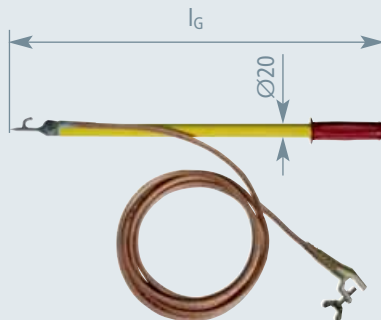


Type	EV TES 465 EK
Part No.	758 020
Cable length	3500 mm
Cable cross-section	16 mm ²
Cable sheath	Transparent
Total length (l _G)	550 mm
Clamping range	Up to 20 mm

With Handle and Spring-loaded Earth Clamp

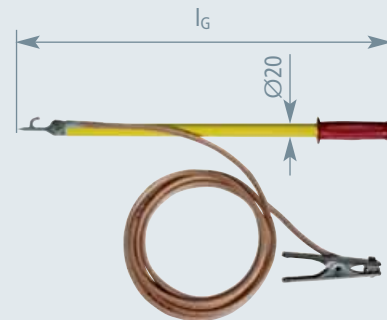

Type	EV TES 465 EZ
Part No.	758 021
Cable length	3500 mm
Cable cross-section	16 mm ²
Cable sheath	Transparent
Total length (l _G)	550 mm
Clamping range	Up to 18 mm

With Handle and Cable Lug at the Earth Cable End

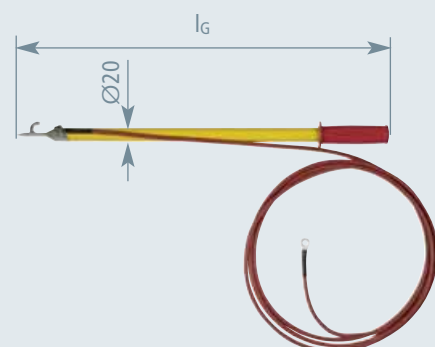

Hole (Ø8.4 mm) and silicone cable


Type	EV TES 465 KS10
Part No.	758 022
Cable length	3500 mm
Cable cross-section	10 mm ²
Cable sheath	Red silicone cable
Total length (l _G)	550 mm

Single-pole Earthing and Discharge Devices

Further Equipment


With Earth Clamp with Wing Bolt

Discharge devices

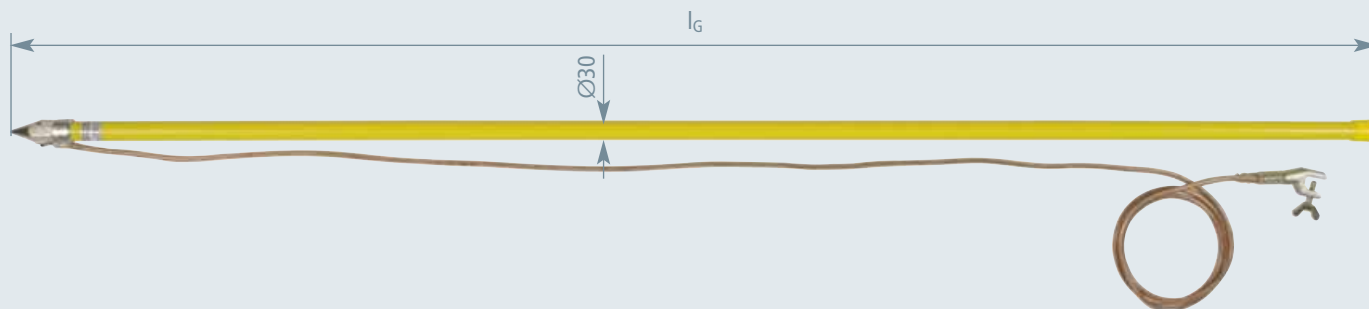


Type	EV TS 2000 EK
Part No.	758 001
Cable length	3500 mm
Cable cross-section	16 mm ²
Cable sheath	Transparent
Total length (l _G)	2050 mm
Clamping range	Up to 20 mm

With Spring-loaded Earth Clamp

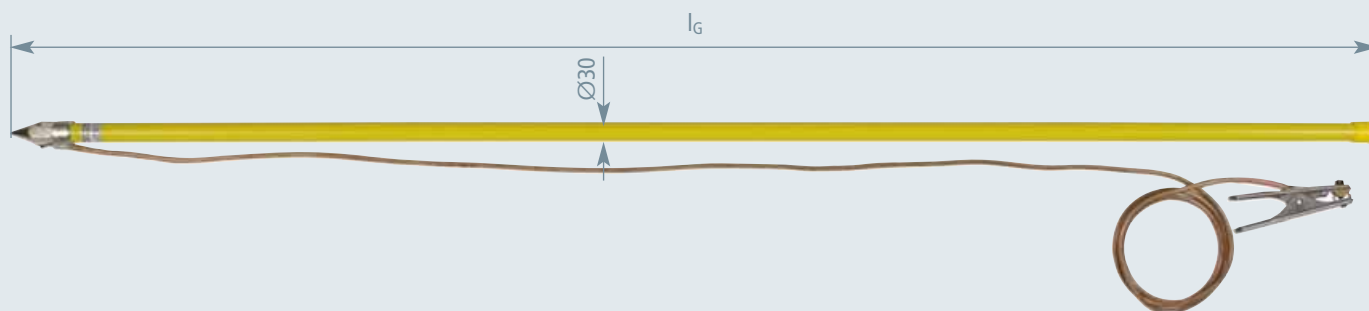

Type	EV TS 2000 EZ
Part No.	758 003
Cable length	3500 mm
Cable cross-section	16 mm ²
Cable sheath	Transparent
Total length (l _G)	2050 mm
Clamping range	Up to 18 mm

With Earth Clamp with Tommy Bar

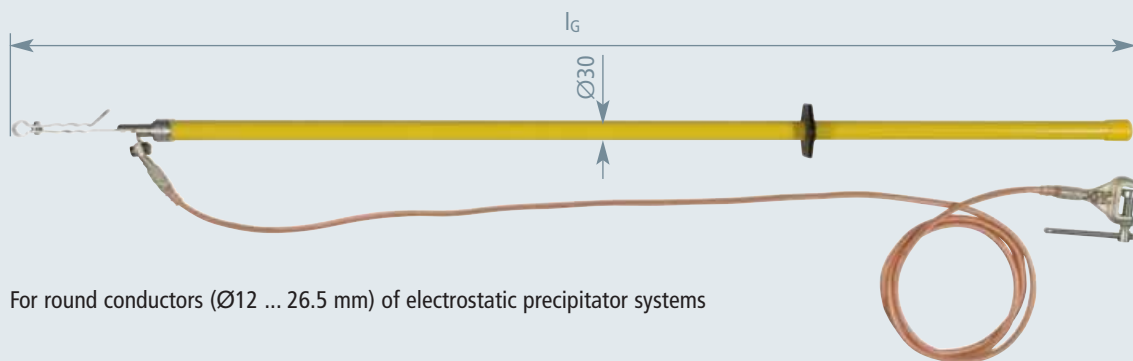

For round conductors (Ø12 ... 26.5 mm) of electrostatic precipitator systems


Type	EV EH 1725 EK
Part No.	758 015
Cable length	3500 mm
Cable cross-section	25 mm ²
Cable sheath	Transparent
Total length (l _G)	1725 mm
Clamping range	Up to 30 mm

Further Equipment

Single-pole Earthing and Discharge Devices

Discharge devices

With plug-in Coupling and Cable Lug at the Earth Cable End

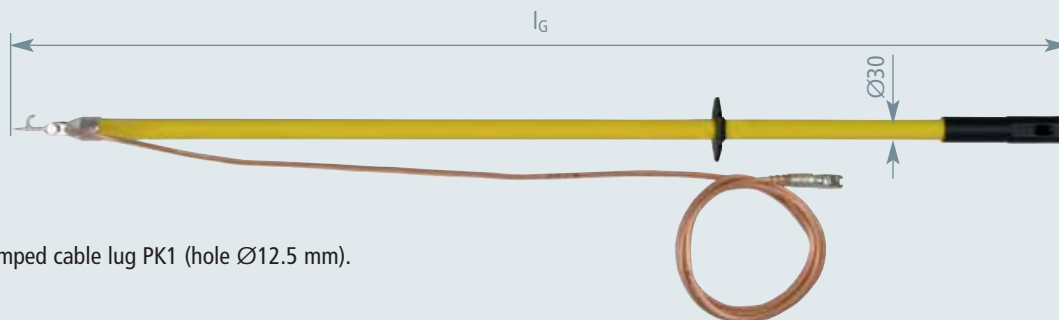

Anti-rotation crimped cable lug PK1 (hole \varnothing 12.5 mm).

Type	EV TES STK 1500 KS
Part No.	758 025
Cable length	3500 mm
Cable cross-section	16 mm ²
Cable sheath	Transparent
Total length (l_G)	1500 mm